

# REAR AXLE & REAR SUSPENSION

GI

# SECTION **RA**

MA

EM

LC

## MODIFICATION NOTICE:

Tightening torque of rear spring front pin mounting bolts has been changed.

EC

## CONTENTS

FE

REAR SUSPENSION.....2

CL

MT

AT

TF

PD

FA

**RA**

BR

ST

RS

BT

HA



EL

IDX

# REAR SUSPENSION

2WD

## SEC. 431

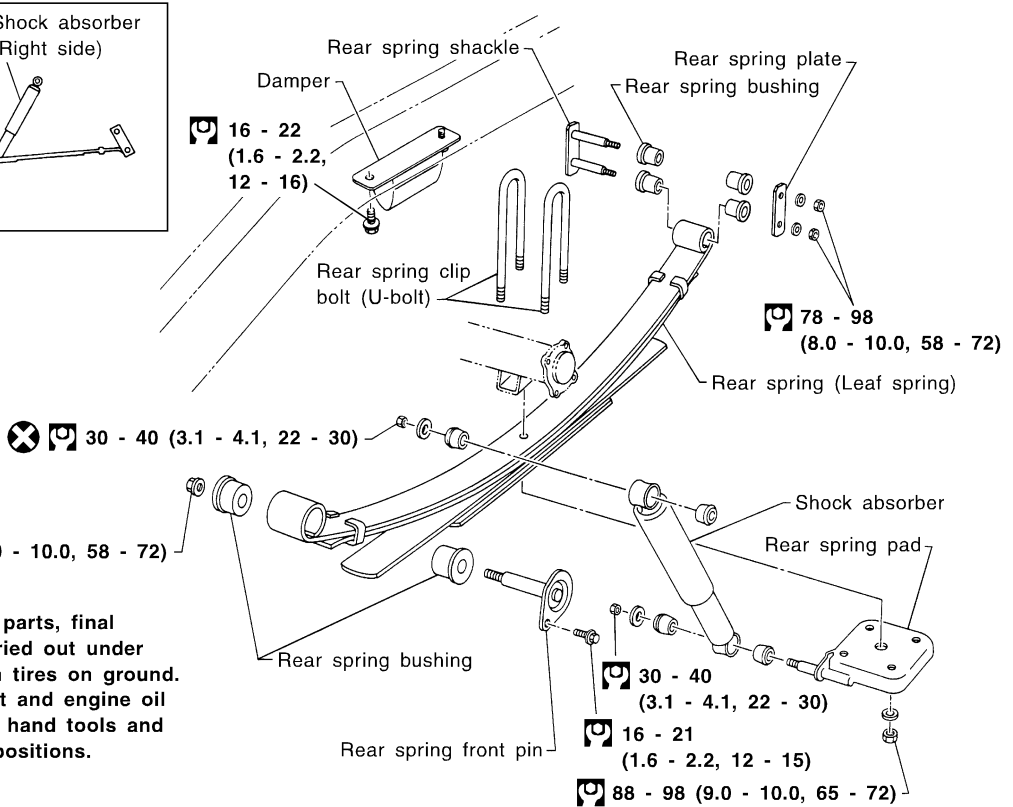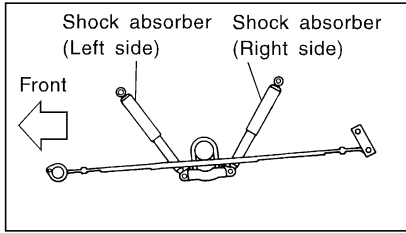

When installing rubber parts, final tightening must be carried out under unladen condition\* with tires on ground.  
 \* Fuel, radiator coolant and engine oil full. Spare tire, jack, hand tools and mats in designated positions.

: N·m (kg-m, ft-lb)

SRA593CB