MAINTENANCE GI

SECTION MA

MA

LC

EC

FE

GL

MT

AT

TF

PD FA

RA

BR

ST

RS

BT

HA

EL


MODIFICATION NOTICE:

The SAE Viscosity Number has been revised.

CONTENTS

RECOMMENDED FLUIDS AND LUBRICANTS.....2

SAE Viscosity Number2

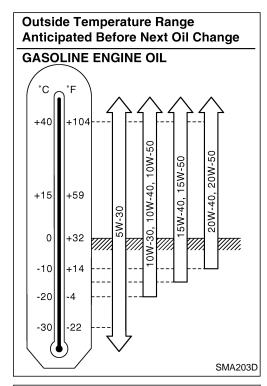


SAE Viscosity Number

GASOLINE ENGINE

• 5W-30 is preferable.

If 5W-30 is not available, select the viscosity, from the chart, that is suitable for the outside temperature range.

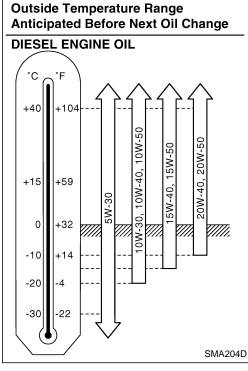

DIESEL ENGINE

5W-30 is preferable.

If 5W-30 is not available, select the viscosity, from the chart, that is suitable for the outside temperature range.